




*Stand-alone Silicon Interoperability system for SRIO with 2 AMC wired Tx – Rx and 1 AMC wired to SMAs*

### **SSRP Mechanical**

Board Size	305 x 244 mm
Operating Temperature	0 to 70 C
Weight	200g
Power Requirement	ATX PS

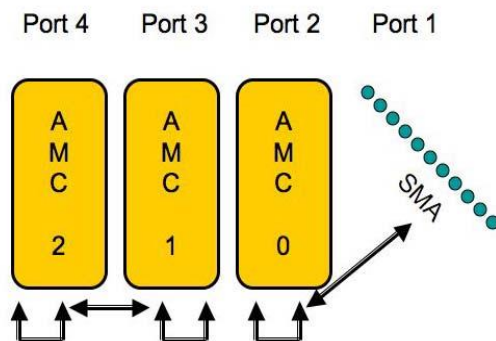

### **Typical Applications for Serial RIO**

- ✓ System level solutions with QoS demands
- ✓ Mesh Networking, wired or wireless
- ✓ Multiprocessor Systems
- ✓ ASIC/SOC/IP development
- ✓ Deterministic board to board solutions
- ✓ Low overhead SMP implementations

**Available from Stock for USD \$3495.00**

Each kit includes Schematics, user manual, standoffs, support  
**Contact US! [www.silicontkx.com](http://www.silicontkx.com) or [info@silicontkx.com](mailto:info@silicontkx.com)**